


illumiGLOW

Product Specification Sheet




Product Breakdown	02
Product Range	04
Product Description / Application	05
Technical Overview	06
Bag Contents	07
Product Hardware	08
Product Hardware p2	09
Product: ILLGLOW-1024	10
Product: ILLGLOW-1025	11
Product: ILLGLOW-2020	12
Product Gallery	13

IIIGLOW-LED-1024 / ILLGLOW-LED-1025:

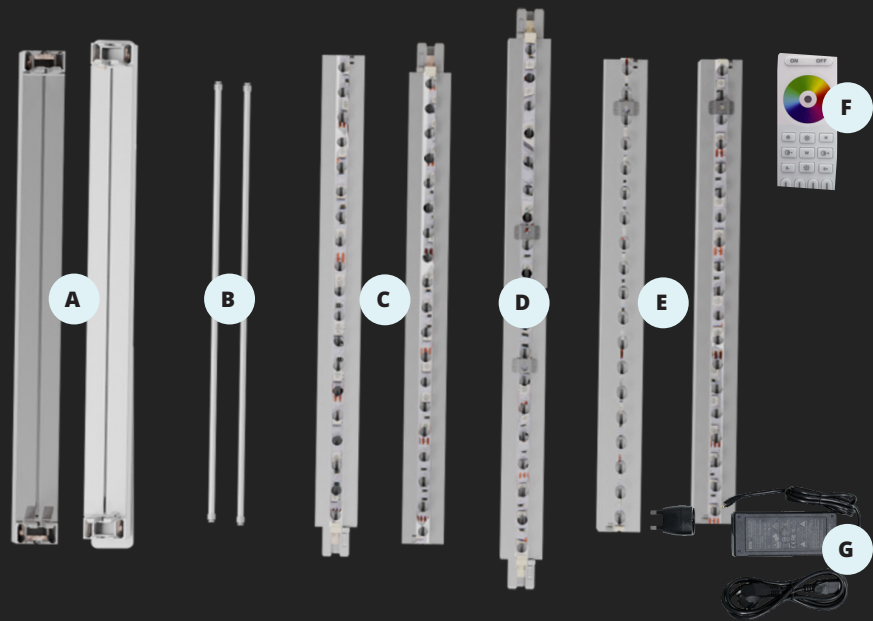


- A:** Top and Bottom (w Feet) sections
- B:** Support Rods
- C:** Vertical Components
- D:** Extension Pieces
- E:** Top Vertical Components
- F:** Remote
- G:** PSU

IIIGLOW-LED-2020

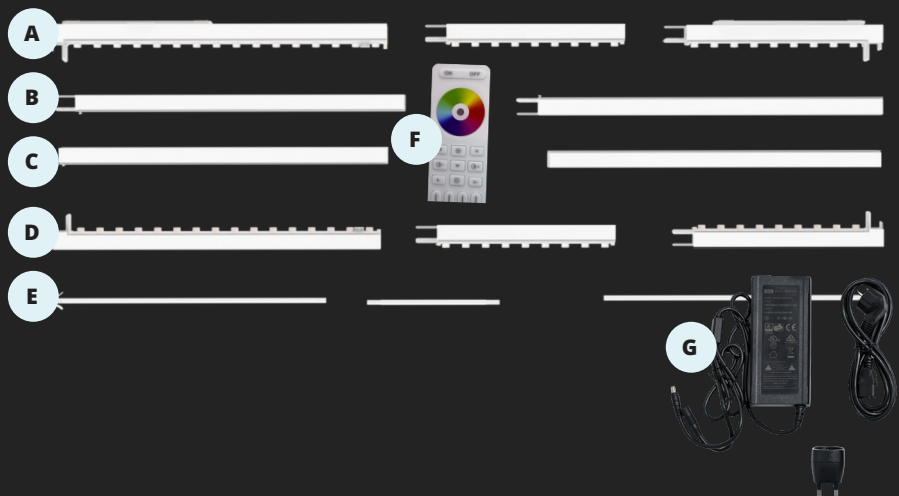


- A:** Top Sections
- B:** Vertical bottom brackets
- C:** Top Vertical brackets
- D:** Bottom Sections
- E:** Support Rod
- F:** Remote
- G:** PSU

IIIGLOW-1024 / ILLGLOW-1025:

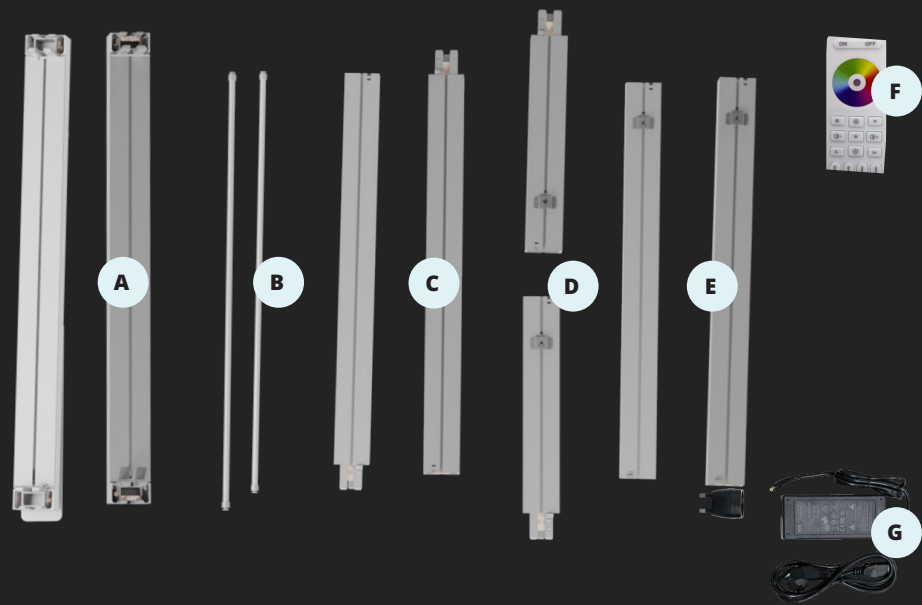


- A:** Top and Bottom (w Feet) sections
- B:** Support Rods
- C:** Vertical Components
- D:** Extension Pieces
- E:** Top Vertical Components
- F:** Remote
- G:** PSU

IIIGLOW-2020

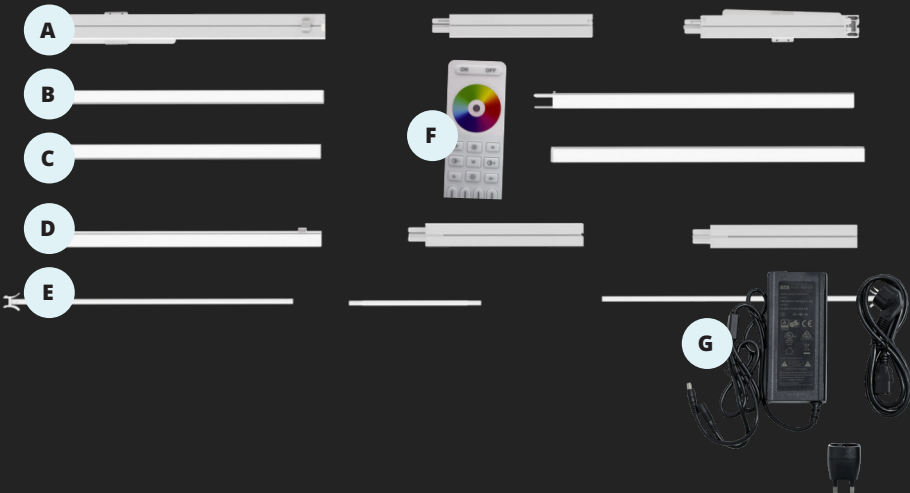


- A:** Top Sections
- B:** Vertical bottom brackets
- C:** Top Vertical brackets
- D:** Bottom Sections
- E:** Support Rod
- F:** Remote
- G:** PSU

ILLGLOW-LED-1024
ILLGLOW-LED-1025

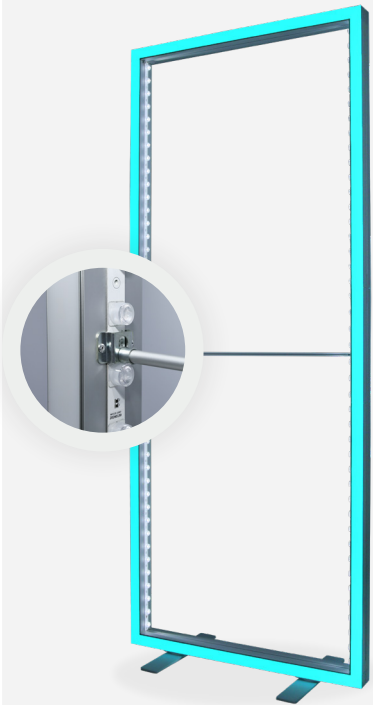

ILLGLOW-1024
ILLGLOW-1025

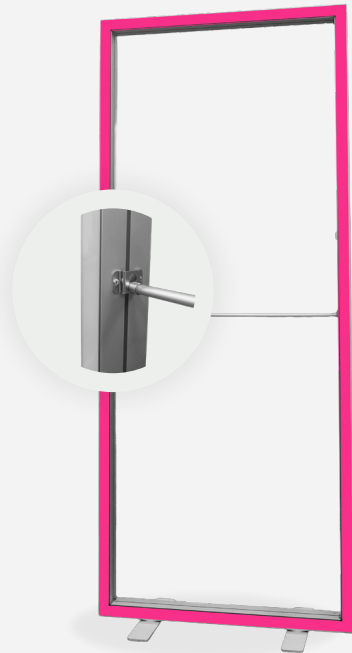

ILLGLOW-LED-2020



ILLGLOW-2020



ILLGLOW-1024
ILLGLOW-LED-1024



ILLGLOW-1025
ILLGLOW-LED-1025



ILLGLOW-2020
ILLGLOW-LED-2020



Create unforgettable brand experiences with illumiGLOW RGB Frames, a premium range of illuminated SEG fabric lightboxes designed to deliver maximum visual impact in retail, exhibition, hospitality and promotional environments.

Unlike traditional lightboxes, illumiGLOW combines vibrant RGB edge illumination with seamless SEG graphics, allowing users to create over 60 different colour effects, dynamic lighting modes and attention-grabbing displays that stand out in any venue.

Available in 1000 x 2000mm extendable to 1000mm x 2400mm and 2000 x 2000mm reducible to 1500mm x 2000mm formats, the range offers exceptional flexibility whilst maintaining a sleek 80mm aluminium frame profile and tool-free assembly. Customers can choose between RGB-only frames which illuminate the frame perimeter or RGB + Internal LED models that combine colourful frame lighting with fully backlit graphics for unrivalled visual presence

Tool Free



The product features toolless connection points with spin out feet with easy installation and breaking down.

Transport



Comes with a heavy duty ABS hard shell case with EVA foam inserts. Includes Wheels and handles for easy transportation.

Lighting Spec

SKU	ILLGLOW-1024	ILLGLOW-LED-1024	ILLGLOW-1025	ILLGLOW-LED-1025	ILLGLOW-2020	ILLGLOW-LED-2020
Electrical	Class II – Double Insulated					
Power Cable	2m Cable with EU Plug and UK Adapter				1x3m single barrel jack PSU with EU Plug and UK Adapter	2x PSU with EU Plug and UK Adapter 1x3m dual barrel jack PSU with EU Plug and UK Adapter
Input Voltage	AC: 110–240V, 50Hz				AC: 100–240V, 50/60Hz 2.5A	AC: 100–240V, 50/60Hz
Output Voltage	DC: 24V, 6.35A				DC: 24V, 6.35A	DC: 24V, 6.35A /8.5A
Power Consumption	108W	216W	122W	224W	128W	288W
LED Configuration	18 LED Lights per 1m					
Light Output	150 Lumens per LED 450 Lumens (2 × 2)					
LED Colour	6500K (Daylight)					

ILLGLOW-LED-1024

ILLGLOW-1024 has the same contents
Without Internal LEDS



ILLGLOW-LED-1025

ILLGLOW-1025 has the same
contents **Without** Internal LEDS




ILLGLOW-2020

ILLGLOW-LED-2020 has the same
contents **With** Internal LEDS





ILLGLOW-1024 / ILLGLOW-1025

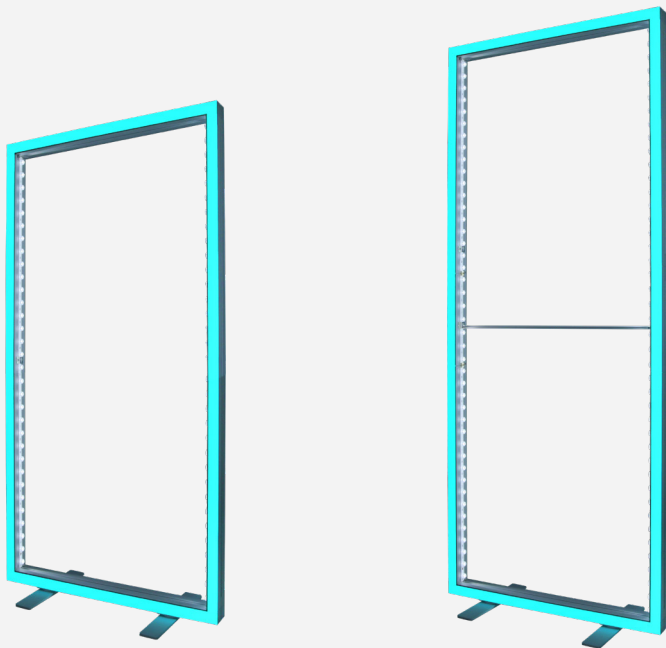



With ILLGLOW-1024 and ILLGLOW-1025, you have the option to reduce the height of the product by removing the middle sections, allowing it to be converted from 2.4 m or 2.5 m to 2 m. You can also choose to display the product with or without the support rod.

PROFILES




Aluminium structure with diffused plastic sleeves, electrical cabling, connector buttons, and an easy-latch system.

REMOTE

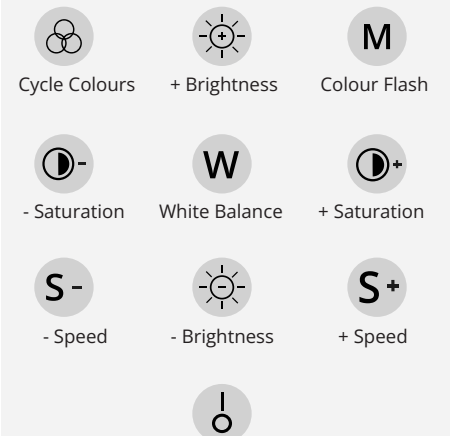

Sync Product Profile Mode
Use one remote to control multiple products


ILLGLOW-2020

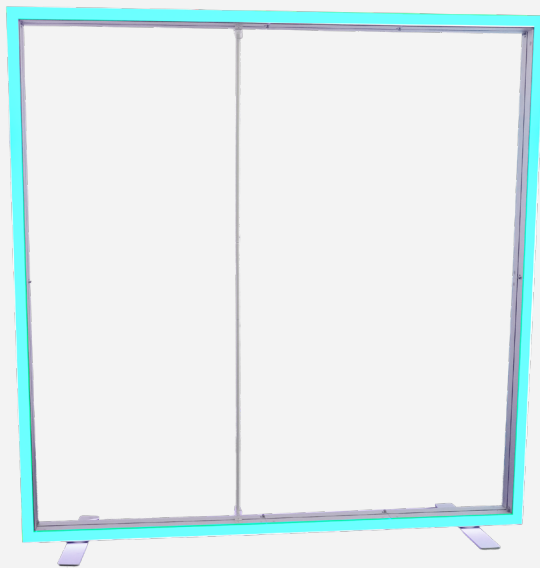

Graphic Codes:

G-ILLGLOW-1520-BL
G-ILLGLOW-1520-BB
G-ILLGLOW-1520-BBN
G-ILLGLOW-1520-PS

14.9 kg

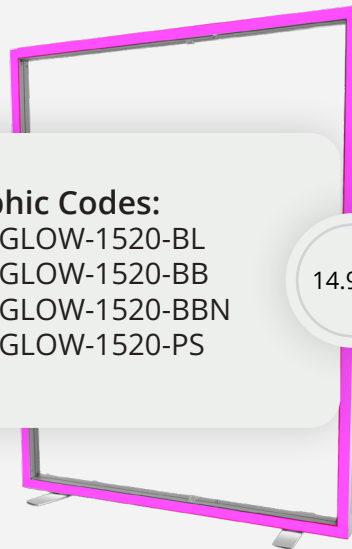

ILLGLOW-2020 uses twist-out feet with a similar configuration. The difference is that the LEDs are positioned at the top and bottom of the product, rather than on the vertical sides, as they are on the 1 x 2.4 m and 1 x 2.5 m versions.

The ILLGLOW-2020 also uses a support rod to maintain tension and reduce bowing. Additionally, the product can be downsized to a width of 1.5 m.

Product Dims:	2400 x 1000mm x 400mm (80mm profile)
Product Weight (kg):	16.1 (W LED) 16.08 (WO LED)
Box Dimensions (mm):	380x200x1170
Box Weight (Gross):	27.00
Hardware Codes:	ILLGLOW-1024 ILLGLOW-LED-1024
Graphic Codes:	G-ILLGLOW-1024-BL G-ILLGLOW-1024-BBN G-ILLGLOW-1024-PS G-ILLGLOW-1024-BB



Product Dims:	2500mm x 1000mm x 400mm (80mm profile)
Product Weight:	16.5kg (w/ LED) 16.38kg (w/o LED)
Box Dimensions (mm):	360 x 260 x 1150
Box Weight (Gross):	28.00kg
Hardware Codes:	ILLGLOW-1025 ILLGLOW-LED-1025
Graphic Codes:	G-ILLGLOW-1025-BL G-ILLGLOW-1025-BBN G-ILLGLOW-1025-PS G-ILLGLOW-1025-BB



Product Dims:	2000mm x 2000mm x 400mm (80mm Profile)
Product Weight (kg):	20.44 (W LED) 18.5 (WO LED)
Box Dimensions (mm):	380 x 390 x 1120
Box Weight (Gross):	29.5
Hardware Codes:	ILLGLOW-2020 ILLGLOW-LED-2020
Graphic Codes:	G-ILLGLOW-2020-BL G-ILLGLOW-2020-BBN G-ILLGLOW-2020-PS G-ILLGLOW-2020-BB



